


FILTER MAINTENANCE PROCEDURE – SANYO PROJECTORS


Your Sanyo projector comes with 2 filters that need to be periodically cleaned based on a preset timer (300+ hrs) during projector use and standby. You will receive a **FILTER WARNING** in the upper right corner of your Promethean board. Notify maintenance when this occurs to have the filters cleaned. After the filters have been removed and physically cleaned by maintenance, please perform the following steps using your Sanyo remote to reset your filter counters.

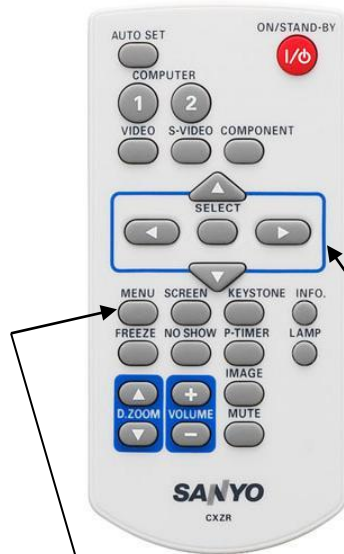

Resetting the Filter Counter

Be sure to reset the Filter counter after cleaning or replacing the filters.


- 1 Press the MENU button to display the On-Screen Menu. Use the Point ▲▼ buttons to select **Setting** and then press the Point ► or the SELECT button.
- 2 Use the Point ▲▼ buttons to select **Filter counter** and then press the Point ► or the SELECT button. Use the Point ▲▼ buttons to select **Filter counter reset** and then press the SELECT button. **Filter counter Reset?** appears. Select **Yes** to continue.
- 3 Another confirmation dialog box appears, select **Yes** to reset the Filter counter.

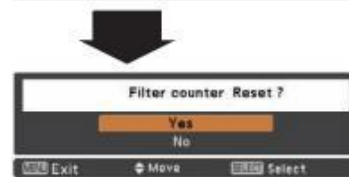

Filter counter Reset? appears.



Select **Yes**, then another confirmatic box appears.

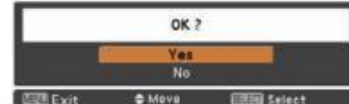

Select **Yes** again to reset the Filter counter.



TECHNOLOGY ISSUES OR REQUESTS....

Please email helpdesk@wyomingarea.org to request technical assistance or for emergencies. All requests are processed daily and in the order they are received. Please provide as many details in the email as possible.